







## Extra narrow symmetrical beam floodlight

**IP 65** Dusttight and Jetproof conforming to DIN, VDE, IEC.  
**Class I.**

Corrosion resistant die cast aluminium alloy body. Thermal shock resistant safety glass in aluminium frame. Stainless steel screws. Weatherproof and durable silicone rubber gasket. High purity anodized reflector chemically brightened. M20x1.5 cable entry diameter 7.5 to 13.5 mm.

**Colour :** Ultraviolet stabilized polyester powder coat finish in Black RAL 9005. Other colours are available upon consultation.

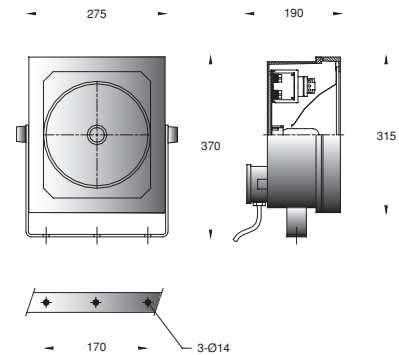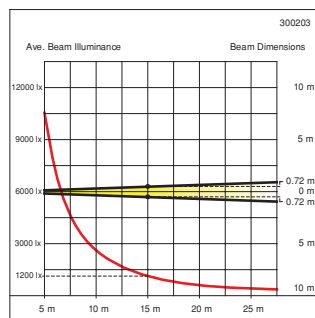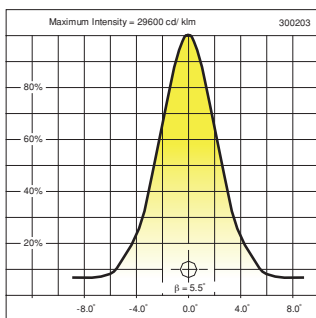

			Lumen
300201	Metal halide	G12 : T-35W	3300
300202	Metal halide	G12 : T-70W	6600
300203	Metal halide	G12 : T-150W	14000