



Enclosed version



Open version

High bay luminaires

Enclosed version

Open version

IP 65 Dusttight and Jetproof



IP 20 For lamp compartment(Open version)
conforming to DIN, VDE, IEC.

Class I.


Corrosion resistant die cast aluminium alloy body. Thermal shock resistant safety glass in a hinged aluminium frame. Stainless steel locking devices. M20x1.5 cable entry diameter 7.5 to 13.5 mm. Integral control gear. Weatherproof and durable silicone rubber gasket. Anodized high purity aluminium reflector chemically brightened. Control gear housing finished with ultraviolet stabilized polyester powder coat in Black RAL 9005.

- For high bay luminaires **enclosed version**, please add "-EV" after the six digits
- For high bay luminaires **open version**, please add "-OV" after the six digits



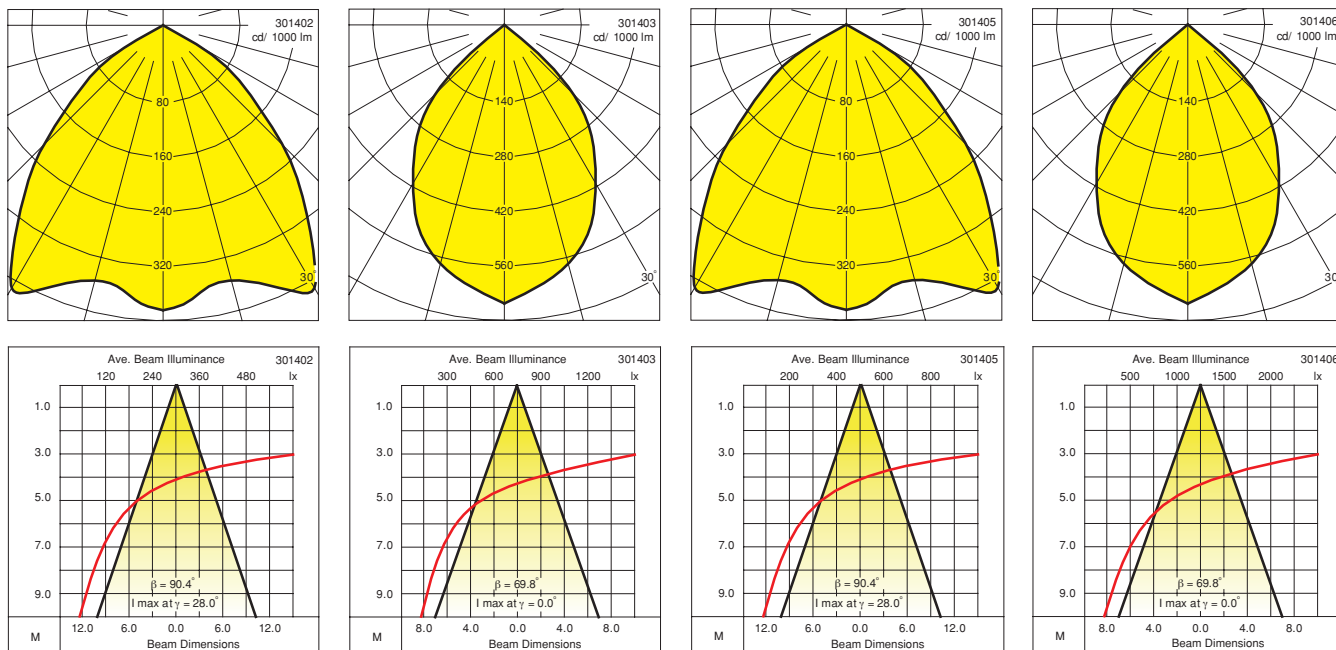

			Lumen
301401	Mercury vapour	E40 : E-250W	13000
301402	Metal halide	E40 : E-250W	19000
301403	High pressure sodium	E40 : E-250W	25000



			Lumen
301404	Mercury vapour	E40 : E-400W	22000
301405	Metal halide	E40 : E-400W	32000
301406	High pressure sodium	E40 : E-400W	47000